

Bridge X_ODA

CROSS SDI SPLITTER



Cross CONVERTER · **SDI** 6DA · **Easy** EXTENSION

CROSS SDI SPLITTER Premium Converter



Bridge X_ODA



Descriptions

Bridge X ODA is device to be selected output between SDI/HDMI from user. It provides 6 SDI output and 1 HDMI output.

Feature

- 1 SDI / 1 HDMI Input
- 6 SDI / 1 HDMI Output
- SDI / HDMI Cross Converter
- Seamless Selector
- User can choose Output from SDI or HDMI Input using Toggle Button


Physical

Dimension (W x H x D)	210 x 90 x 22 (mm)
Weight	315g
Power Level	+12 VDC
Power Consumption	6 Watts
Operating Temperature	-20°C ~ 70°C
Humidity	0 to 95% RH, non-condensing

Image View





Drawing Dimension [mm]

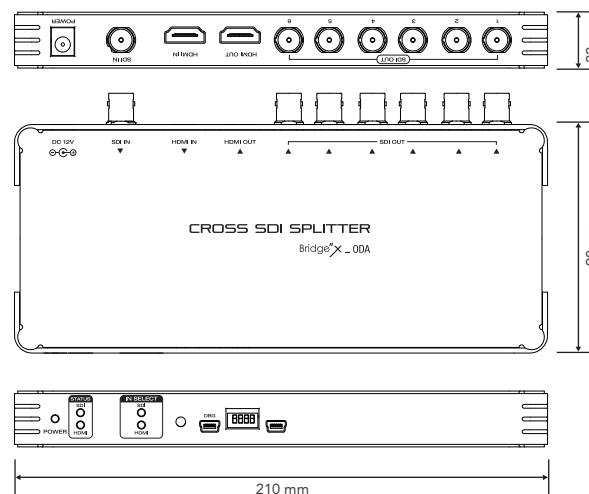

Digital Video Specs.

- Supports HDMI v1.3
- Supports multi-rate SDI formats
- SMPTE 296M: 720p (60/59.94/50)
- SMPTE-274M, SMPTE-292M: 1080i (60/59.94/50)
- SMPTE-424M: 1080p (60/59.94/50) 3G

DIP S/W Function

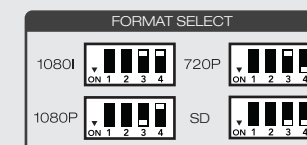

Application

